

QSFP+ ER I-Temp Optical Transceiver

Part Number - VQ-40ER4IS-AA

VQ-40ER4IS-AA is an optical transceiver based on Ethernet IEEE 802.3ba standard and SFF-8436 standard. The QSFP+ transceiver converts 4 inputs channels of 10Gb/s electrical data to 4 CWDM optical signals and multiplexes them into a single channel for 40Gb/s optical transmission. Reversely, on the receiver side, the module optically de-multiplexes a 40Gb/s input into 4 CWDM channels signals and converts them to 4 channel output electrical data. The central wavelengths of the 4 CWDM channels are 1271, 1291, 1311 and 1331 nm as members of the CWDM wavelength grid defined in ITU-T G694.2.

Features

- Supports 40Gbps
- Single 3.3V Power Supply
- Commercial Power dissipation <3.5W and Industrial Power dissipation <4.5W
- Up to 40km over SMF
- Industrial operating case temperature range: -40°C to 85°C
- Four 10G DFB base CWDM channels on transmitter side
- Duplex LC receptacles
- I2C interface with integrated Digital Diagnostic Monitoring
- Safety Certification: TUV/UL/FDA*Note1
- RoHS Compliant

Applications

- 40GBASE - ER4 Ethernet
- InfiniBand QDR and DDR interconnects
- Client-side 40G Telecom connections

Ordering Information

Part Number	Description	Bail Color
VQ-40ER4IS-AA	40G QSFP+ CWDM, CML/CML interface, Up to 40km, with DDMI function	Red

General Specifications

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Storage Temperature	T _S	-40		85	C	
Operating Case Temperature	T _{OP}	-40		85	C	
Power Supply Voltage	V _{CC}	3.135	3.3	3.465	V	
Relative Humidity (non-condensaton)	RH	5		85	%	
Damage Threshold, each lane	DT	3.8			dBm	
Data Rate, each lane			10.3125	11.2	Gb/s	
Supply Voltage	V _{CC}	-0.5		3.6	V	
Power Dissipation				4.5	W	
Link Distance with G.652	D			40	km	

Optical – Transmitter

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Total Output Optical Power	PT			10.5	dBm	1
Average Launch Power (each Lane)	PTX	-2.7		4.5	dBm	
Optical Center Wavelength (L0 Lane)	λ C	1264.5	1271	1277.5	nm	
Optical Center Wavelength (L1 Lane)	λ C	1284.5	1291	1297.5	nm	
Optical Center Wavelength (L2 Lane)	λ C	1304.5	1311	1317.5	nm	
Optical Center Wavelength (L3 Lane)	λ C	1324.5	1331	1337.5	nm	
Optical Modulation Amplitude (each Lane)	OMA	0.3		5	dBm	
Extinction Ratio	ER	5.5			dB	
Side Mode Suppression Ratio	SMSR	30			dB	
Relative Intensity Noise	RIN			-128	dB/Hz	
Transmitter Reflectance	RT			-12	dB	
Optical Return Loss Tolerance	TOL			20	dB	
Transmitter Eye Mask	Compliant with IEEE 802.3ba					
Launch Power of OFF Transmitter	POUT_OFF			-30	dBm	1

1. Average

Optical – Receiver

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Optical Center Wavelength (L0 lane)	λC	1264.5	1271	1277.5	nm	
Optical Center Wavelength (L1 lane)	λC	1284.5	1291	1297.5	nm	
Optical Center Wavelength (L2 lane)	λC	1304.5	1311	1317.5	nm	
Optical Center Wavelength (L3 lane)	λC	1324.5	1331	1337.5	nm	
Optical Input Power (each lane)	PRX	-21.2		-4.5	dBm	1
Damage Threshold (each lane)	P	3.8			dBm	
Receiver Sensitivity (OMA) (each lane)	RX SEN1			-19	dBm	
Stressed Receiver Sensitivity in OMA (each lane)				-16.8	dBm	
LOS Assert	LOSA	-35			dBm	
LOS De-Assert	LOSD			-23	dBm	
LOS Hysteresis	LOSH	0.5			dB	

1. Average, Informative


Electrical- Transmitter

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Input differential impedance	R_{IN}		100		Ω	
Differential data input swing	$V_{IN PP}$	190		700	mV	
Transmit Disable Voltage	V_D	$V_{CC}-1.3$		V_{CC}	V	
Transmit Enable Voltage	V_{EN}	V_{EE}		$V_{EE} +0.8$	V	

Electrical – Receiver

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Differential data output swing	$V_{OUT PP}$	300		850	mV	
AC common mode output voltage				7.5	mV	RMS
Output Impedance (Differential)	Zout	90	100	110	ohms	
Output Transition Time		28			ps	20%~80%
AC common mode output voltage				7.5	mV	RMS

Block Diagram

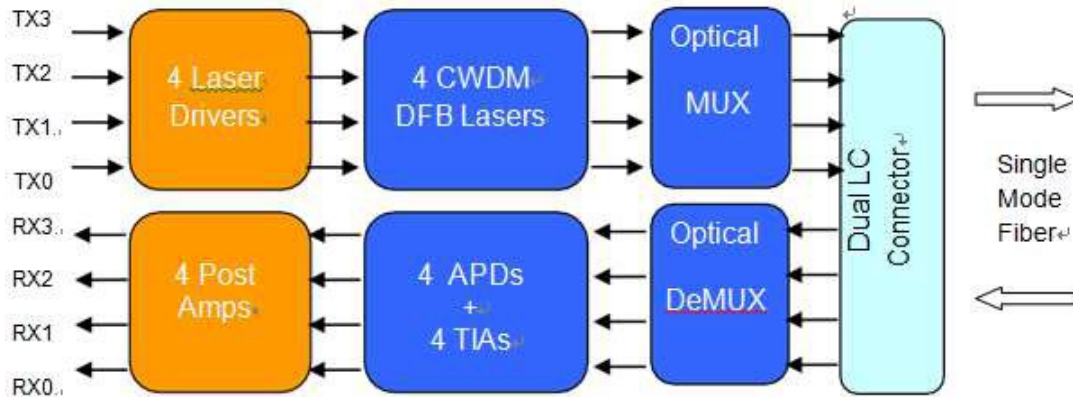


Functional Description

VQ-40ER4IS-AA is an optical transceiver module designed for 40km optical communication applications. The design is compliant to 40GBASE-ER4 of the IEEE P802.3ba standard. The module converts 4 input channels of 10Gb/s electrical data into 4 CWDM optical signals and multiplexes them into a single channel for 40Gb/s optical transmission. Reversely, on the receiver side, the module optically de-multiplexes a 40Gb/s input into 4 CWDM channel signals and converts them to 4 channel output electrical data by APD detectors and TIAs.


The central wavelengths of the 4 CWDM channels are 1271, 1291, 1311, and 1331 nm as members of the CWDM wavelength grid defined in ITU-T G.694.2. It contains a duplex LC connector for the optical interface and a 148-pin connector for the electrical interface. To minimize the optical dispersion in the long-haul system, the single-mode fiber (SMF) is to be applied in this module.

The product is designed with form factor, optical/electrical connection, and digital diagnostic interface according to the QSFP+ Multi-Source Agreement (MSA). It has been designed to meet the harshest external operating conditions including temperature, humidity, and EMI interference.

Electrical Connector Layout

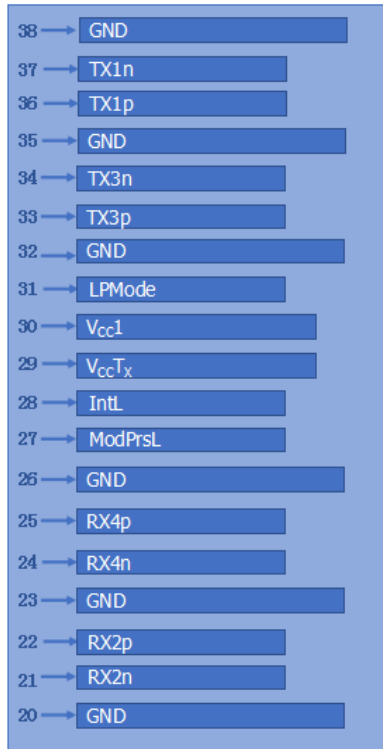

Top of Board

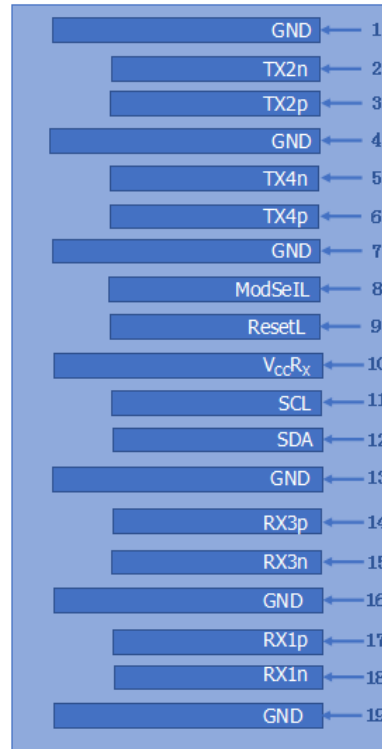

Bottom of Board


Preliminary

Electrical Pin Definition

PIN #	Symbol	Description	Remarks
1	GND	Ground	1
2	Tx2n	Transmitter Inverted Data Input, LAN2	
3	Tx2p	Transmitter Non-Inverted Data Input, LAN2	
4	GND	Ground	1
5	Tx4n	Transmitter Inverted Data Input, LAN4	
6	Tx4p	Transmitter Non-Inverted Data Input, LAN4	
7	GND	Ground	1
8	ModSelL	Module select	
9	ResetL	Module Reset	
10	V _{cc} RX	+3.3V Power Supply Receiver	2
11	SCL	2-wire serial interface clock	
12	SDA	2-wire serial interface data	
13	GND	Ground	
14	Rx3p	Receiver Non-Inverted Data Output, LAN3	
15	Rx3n	Receiver Inverted Data Output, LAN3	
16	GND	Ground	1
17	Rx1p	Receiver Non-Inverted Data Output, LAN1	
18	Rx1n	Receiver Inverted Data Output, LAN1	
19	GND	Ground	1
20	GND	Ground	1
21	Rx2n	Receiver Inverted Data Output, LAN2	
22	Rx2p	Receiver Non-Inverted Data Output, LAN2	
23	GND	Ground	1
24	Rx4n	Receiver Inverted Data Output, LAN4	1
25	Rx4p	Receiver Non-Inverted Data Output, LAN4	
26	GND	Ground	1
27	ModPrsL	Module Present	
29	IntL	Interrupt	
29	V _{cc} TX	+3.3V Power Supply transmitter	2
30	V _{cc} 1	+3.3V Power Supply	2
31	LPMODE	Low Power Mode	
32	GND	Ground	1
33	Tx3p	Transmitter Non-Inverted Data Input, LAN3	
34	Tx3n	Transmitter Inverted Data Input, LAN3	
35	GND	Ground	1
36	Tx1p	Transmitter Non-Inverted Data Input, LAN1	
37	Tx1n	Transmitter Inverted Data Input, LAN1	
38	GND	Ground	1

1. Ground is the symbol and supply (power) common for QSFP+ modules. All are common within the QSFP+ module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal common ground plane.
2. VccRx, Vcc1, and VccTx are the receiving and transmission power suppliers and shall be applied concurrently. Recommended host board power supply filtering. VccRx, Vcc1, and VccTx may be internally connected within the QSFP+ transceiver module in any combination. The connector pins are each rated for a maximum current of 500mA.

Mechanical Dimensions

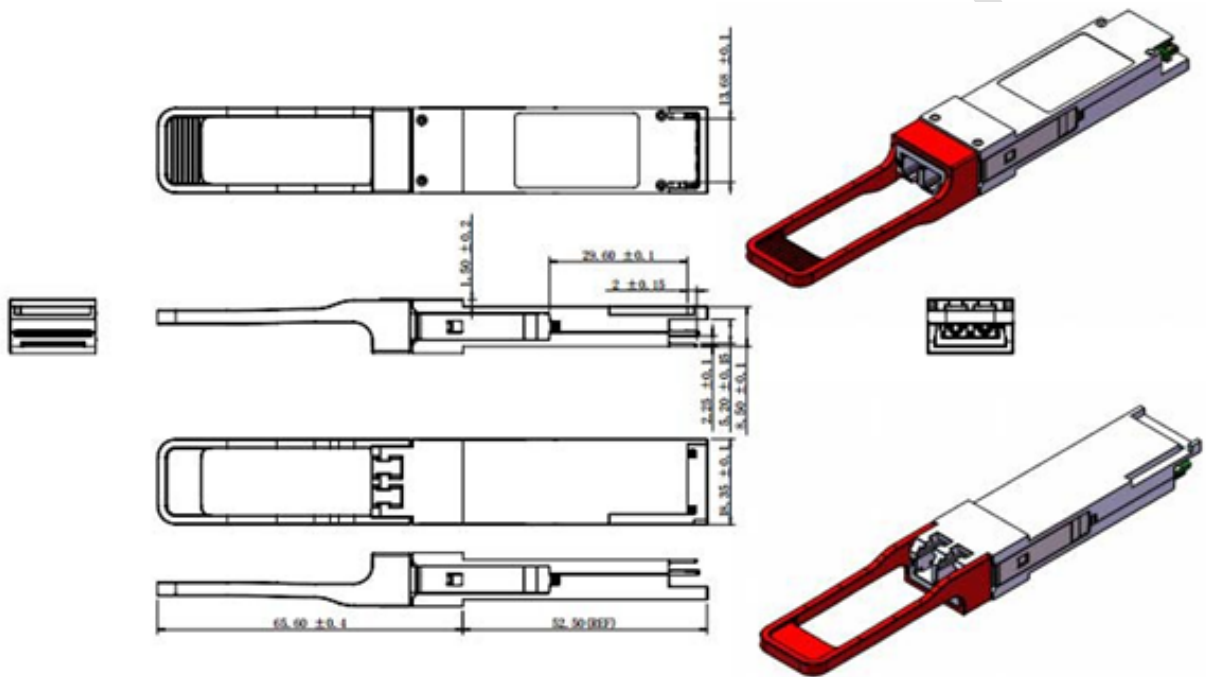

Note -This 2D drawing is only for reference
 ALL DIMENSIONS ARE ±0.2mm UNLESS OTHERWISE SPECIFIED
 UNIT: mm

Contact Information

Vitex LLC
 210 Sylvan Ave, Suite 25
 Englewood Cliffs, NJ 07632
 201-296-0145 | info@vitextech.com | www.vitextech.com